

ORIENT BLACK[®] N660LP

FURNACE BLACK

PRODUCT DESCRIPTION

Orient Black N660LP is a low surface area, medium structure general purpose furnace grade with low pellet hardness, which provides excellent workability and superior dispersion.


APPLICATION

Orient Black N660LP can be used as reinforcing filler in tyre tubes, tyre inner liners, profile compounds, hoses, hose covers, seals and gaskets. It offers lower heat buildup, long fatigue life, good processibility and excellent surface finish appearance.



RECOMMENDED APPLICATION

■ Highly recommended
 ■ Recommended under advice
 ■ Not recommended

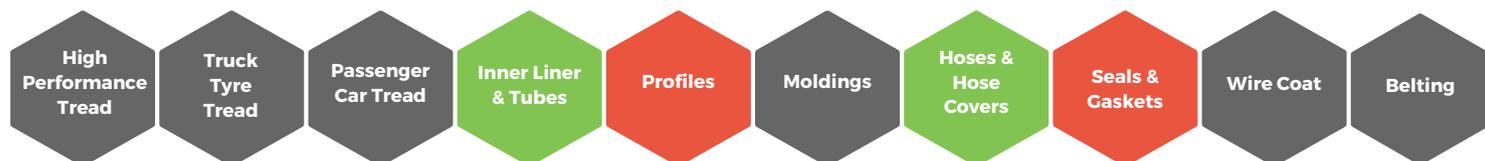

QUALITY PARAMETERS

Property	Unit	Typical value	Test method
STSA	m ² /g	34	ASTM D6556
Iodine Adsorption No.	g/kg	36	ASTM D1510
OAN	cm ³ /100g	90	ASTM D2414
COAN	cm ³ /100g	74	ASTM D3493
Sieve Residue - 325 mesh	ppm	80	ASTM D1514
Ash Content	%	≤0.75	ASTM D1506
Heating Loss	%	≤1.5	ASTM D1509
Pellet Hardness (n=20)	gf	20	ASTM D5230

PACKAGING

Packaging mode	Per unit qty. (kg)	No. of bags/40 ft. container
Paper Bag	25	960
Big Bag (FIBC)	1150	20

PRODUCT SAFETY

- Product is REACH registered
- Refer to SDS for handling purpose

PCBL Limited

Registered Office: 31 Netaji Subhas Road, Kolkata - 700 001, WB, India

Corporate Office: RPSG House, 4th Floor, 2/4 Judges Court Road, Kolkata - 700 027, WB, India

P: +91 33 6625 1443 | F: +91 33 2248 0140/2243 6681 | W: www.pcblttd.com

E: pcbl.mktg-international@rpsg.in | pcbl.mktg-national@rpsg.in | pcbl.rubbertech@rpsg.in

